

Kettingen / Chains




1. Kortschalm lastkettingen G80 / Short link load chains G80 (EN 818-2)



2. Kortschalm lastkettingen G100 / Short link load chains G100




3. Gecalibreerde lastkettingen voor elektrische kettingtakels G80 / Calibrated load chains for electric chain hoists G80

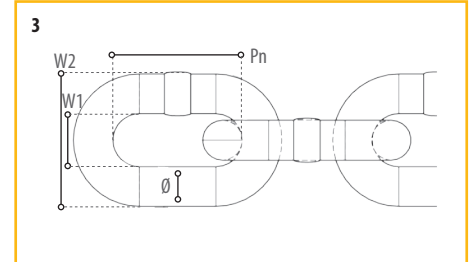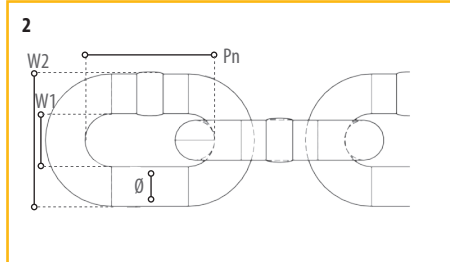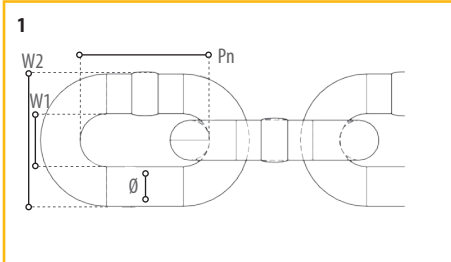

1 Kortschalm lastkettingen G80 / Short link load chains G80 Afmetingen / Dimensions							
Item no.	ø (mm)	W1	W2	Pn	WLL (ton)	Breaking force (kN)	
CEM. 06 x 18	6.00	7.8	22.2	18	1.12	45.20	
CEM. 07 x 21	7.00	9.1	25.9	21	1.50	61.60	
CEM. 08 x 24	8.00	10.4	29.6	24	2.00	80.40	
CEM. 10 x 30	10.00	13.0	37.0	30	3.15	126.00	
CEM. 13 x 39	13.00	16.9	48.1	39	5.30	212.00	
CEM. 16 x 48	16.00	20.8	59.2	48	8.00	322.00	
CEM. 20 x 60	20.00	26.0	74.0	60	12.50	503.00	
CEM. 22 x 66	22.00	28.6	81.4	66	15.00	608.00	
CEM. 26 x 78	26.00	33.8	96.2	78	21.20	849.00	
CEM. 32 x 96	32.00	41.6	118.0	96	31.50	1290.00	

2 Kortschalm lastkettingen G100 / Short link load chains G100 Afmetingen / Dimensions							
Item no.	ø (mm)	W1	W2	Pn	WLL (ton)	Breaking force (kN)	
CEM. 01.06 x 18	6.00	7.8	22.2	18	1.40	56.00	
CEM. 01.08 x 24	8.00	10.4	29.6	24	2.50	100.00	
CEM. 01.10 x 30	10.00	13.0	37.0	30	4.00	160.00	
CEM. 01.13 x 39	13.00	16.9	48.1	39	6.70	268.00	
CEM. 01.16 x 48	16.00	20.8	59.2	48	10.00	400.00	
CEM. 01.20 x 60	20.00	26.0	74.0	60	16.00	640.00	
CEM. 01.22 x 66	22.00	28.6	81.4	66	19.00	760.00	
CEM. 01.26 x 78	26.00	33.8	96.2	78	26.50	1060.00	
CEM. 01.32 x 96	32.00	41.6	118.0	96	39.30	-	

3 Gecalibreerde lastkettingen voor elektrische kettingtakels G80 / Calibrated load chains for electric chain hoists G80 Afmetingen / Dimensions							
Item no.	ø (mm)	W1	W2	Pn	WLL (ton)	Breaking force (kN)	
DFK. 5.6 x 17	5.70	7.4	14.8	17.0	1.00	40.00	
Li.6.3 x 19.1	6.30	8.6	21.0	19.1	1.35	54.00	
DFK. 7.1 x 20.2	7.10	8.4	22.3	20.2	1.60	64.00	
DFK. 10 x 30	10.00	12.4	32.3	30.0	3.20	128.00	
DFK. 11.2 x 34	11.20	14.8	37.2	34.0	4.00	160.00	



Chaînes / Ketten




1. Chaînes de charge G80 /
Kurzgliedrige Lastketten G80



2. Chaînes de charge G100 /
Kurzgliedrige Lastketten G100



3. Chaînes de charge calibrées pour
palans à chaîne électriques G80 /
Kalibrierte Lastketten für
Elektrokettenzüge G80

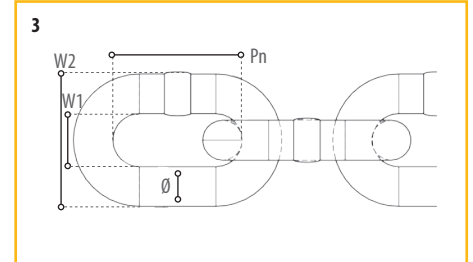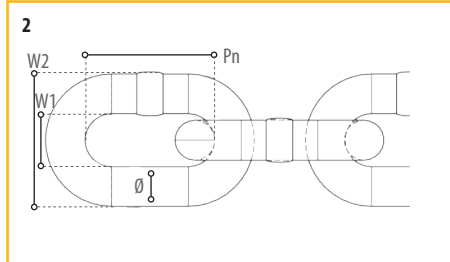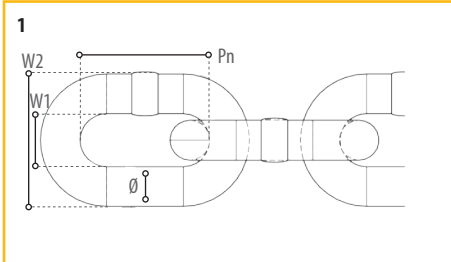

1 Chaînes de charge G80 / Kurzgliedrige Lastketten G80 Dimensions / Abmessungen (mm)							
Item no.	ø (mm)	W1	W2	Pn	WLL (ton)	Breaking force (kN)	
CEM. 06 x 18	6.00	7.8	22.2	18	1.12	45.20	
CEM. 07 x 21	7.00	9.1	25.9	21	1.50	61.60	
CEM. 08 x 24	8.00	10.4	29.6	24	2.00	80.40	
CEM. 10 x 30	10.00	13.0	37.0	30	3.15	126.00	
CEM. 13 x 39	13.00	16.9	48.1	39	5.30	212.00	
CEM. 16 x 48	16.00	20.8	59.2	48	8.00	322.00	
CEM. 20 x 60	20.00	26.0	74.0	60	12.50	503.00	
CEM. 22 x 66	22.00	28.6	81.4	66	15.00	608.00	
CEM. 26 x 78	26.00	33.8	96.2	78	21.20	849.00	
CEM. 32 x 96	32.00	41.6	118.0	96	31.50	1290.00	

2 Chaînes de charge G100 / Kurzgliedrige Lastketten G100 Dimensions / Abmessungen (mm)							
Item no.	ø (mm)	W1	W2	Pn	WLL (ton)	Breaking force (kN)	
CEM. 01.06 x 18	6.00	7.8	22.2	18	1.40	56.00	
CEM. 01.08 x 24	8.00	10.4	29.6	24	2.50	100.00	
CEM. 01.10 x 30	10.00	13.0	37.0	30	4.00	160.00	
CEM. 01.13 x 39	13.00	16.9	48.1	39	6.70	268.00	
CEM. 01.16 x 48	16.00	20.8	59.2	48	10.00	400.00	
CEM. 01.20 x 60	20.00	26.0	74.0	60	16.00	640.00	
CEM. 01.22 x 66	22.00	28.6	81.4	66	19.00	760.00	
CEM. 01.26 x 78	26.00	33.8	96.2	78	26.50	1060.00	
CEM. 01.32 x 96	32.00	41.6	118.0	96	39.30	-	

3 Chaînes de charge calibrées pour palans à chaîne électriques G80 / Kalibrierte Lastketten für Elektrokettenzüge G80 Dimensions / Abmessungen (mm)							
Item no.	ø (mm)	W1	W2	Pn	WLL (ton)	Breaking force (kN)	
DFK. 5.6 x 17	5.70	7.4	14.8	17.0	1.00	40.00	
Li.6.3 x 19.1	6.30	8.6	21.0	19.1	1.35	54.00	
DFK. 7.1 x 20.2	7.10	8.4	22.3	20.2	1.60	64.00	
DFK. 10 x 30	10.00	12.4	32.3	30.0	3.20	128.00	
DFK. 11.2 x 34	11.20	14.8	37.2	34.0	4.00	160.00	